

MS220A-XX 50mm SEGMENTED LED [2"] CHARACTERS



MICRO COMM SEGMENTED LED

Segmented LED, digital indicator for floor position display and direction with flashing side viewing arrows. Any alphanumeric character can be displayed.

TYPICAL APPLICATIONS:

- Car-OP panel
- Transom-car or hall

FEATURES:

- Fast 3 wire hookup
- Latched inputs
- Self testing
- Alternate message
- Passing chime output
- Error detection and correction



C.E. Electronics, Inc. (US) 2107 Industrial Drive, Bryan, Ohio 43506 p: 419.636.6705 www.cееlectronics.com

C.E. Electronics, Ltd. (UK) P.O. Box 1679 Marlow, Bucks SL7 3ZG, UK p: +44 (0) 1628 487633 www.cееlectronics.co.uk




C.E. Electronics, Inc.
2107 Industrial Drive
Bryan, OH 43506
PH (419) 636-6705 FX (419) 636-2516
www.ccelectronics.com

MS220A-XX


Ver. 2 Rel. 7/22/2024

Micro Comm
SERIES

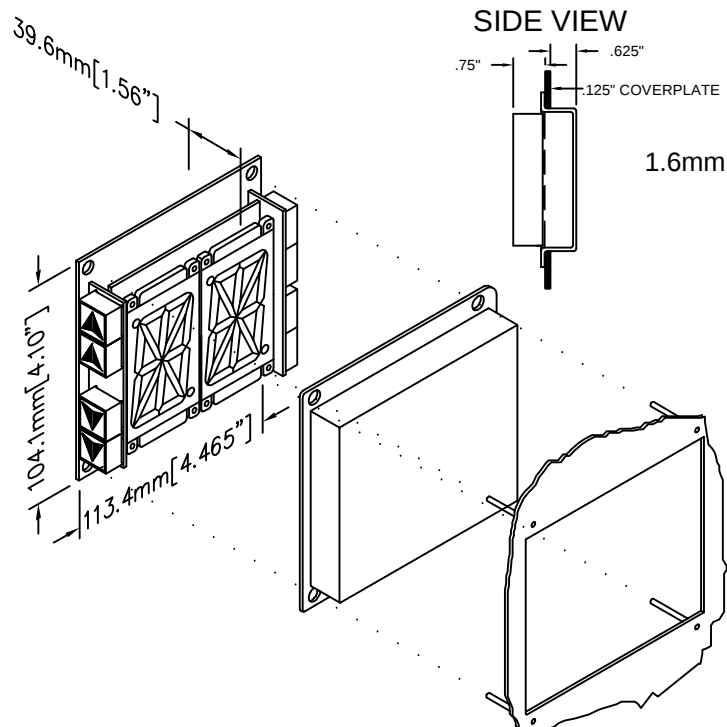

SIDE VIEW

PANEL PREPARATION

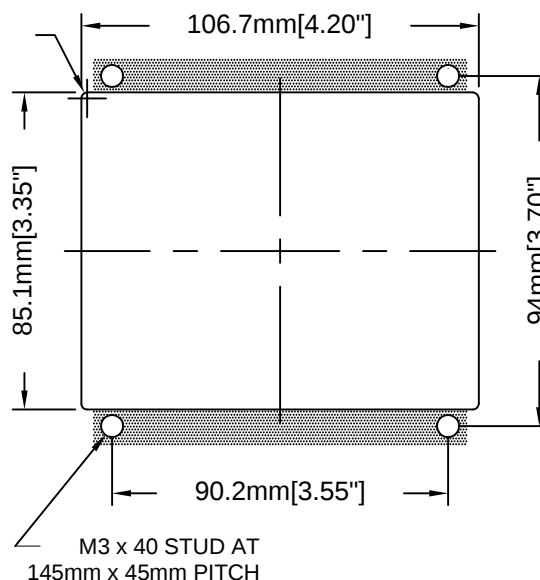

CUTOUT TOLERANCE: +.50mm
- 0.0

SEGMENTED LED

Segmented LED, digital indicator for floor position display and direction with side viewing arrows. Any alphanumeric character can be displayed.

Typical Applications:

- Car-OP Panel
- Transom-car or Hall

Features:


- Fast 3 wire hookup
- Latched inputs
- Self testing
- Alternate message
- Passing chime output
- Error detection and correction

RENEWAL PARTS

Lens: 104-6023 GRAY

INPUT CONNECTION

- ONLY THREE HOIST WIRES REQUIRED FROM "CCU" TO "RDI". PLUGGABLE TERMINAL BLOCK ACCOMMODATES A SECOND SET OF WIRES FOR "DAISY CHAINING" MULTIPLE RDI'S. NO ADDITIONAL UNIT POWER REQUIRED.

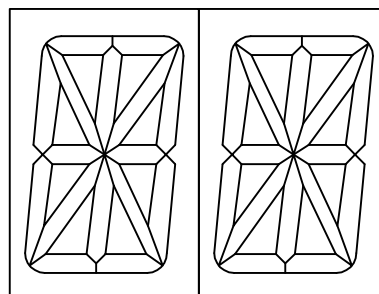

50mm [2"] CHARACTERS

TO ORDER - SPECIFY MS220A - X X

COLOR:

"R" = RED CHARACTER, RED & GREEN ARROW
"G" = GREEN CHARACTER, RED & GREEN ARROW
"H" = GREEN CHARACTER, GREEN ARROW
"B" = BLUE CHARACTER, BLUE ARROW
"M" = BLUE CHARACTER, RED & GREEN ARROW
"W" = WHITE CHARACTER, WHITE ARROW

LENS:

"G" = GRAY
"X" = NO LENS

NOTE:

1. This is not a stand alone unit. Must be used in conjunction with Micro Comm drivers.