





C.E. Electronics, Inc.
2107 Industrial Drive
Bryan, OH 43506
PH (419) 636-6705 FX (419) 636-2516
www.ccelectronics.com

VS3962-XX

Ver 1. Rel. 6/11/2021

ACCESSORIES

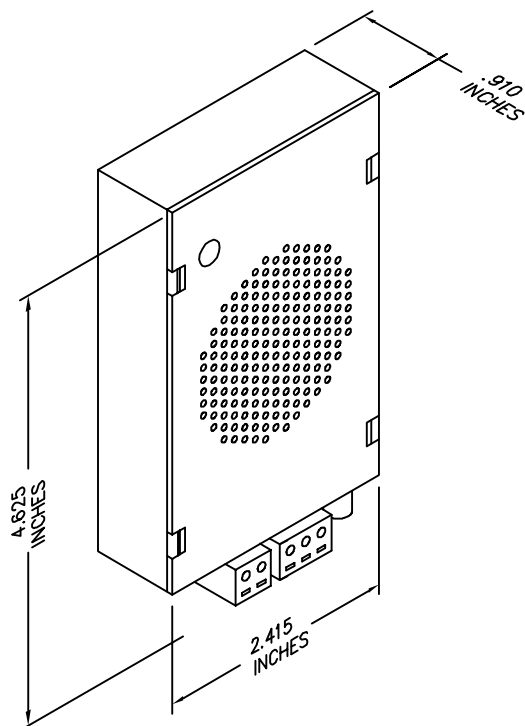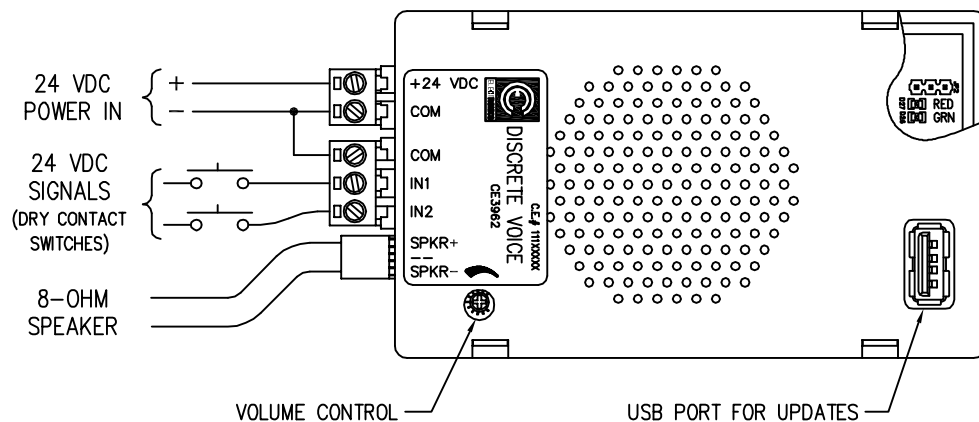

DISCRETE VOICE ANNUNCIATOR

This unit is designed to sound: two (2) audio tones or messages.

Typical Applications

- For escalators, moving walkways, car or hall indications.

Features:

- Adjustable volume
- Conforms to overload Code ASME A17.1
- Compact Design
- Up to 8 minutes of speech
- Can be used for single or double audio inputs
- Solid State output

TO ORDER: SPECIFY VS3962 - X X

OPTION #1 - SPEAKER


B = 5 INCH VOICE SPEAKER
D = WATER RESISTANT SPEAKER
E = 3 INCH WIDE VOICE SPEAKER
H = SPEAKER BOX

OPTION #2 - POWER SUPPLY

P = WITH 24 VDC POWER SUPPLY
X = NO POWER SUPPLY

VS3962 - DISCRETE VOICE UNIT

JOB# _____

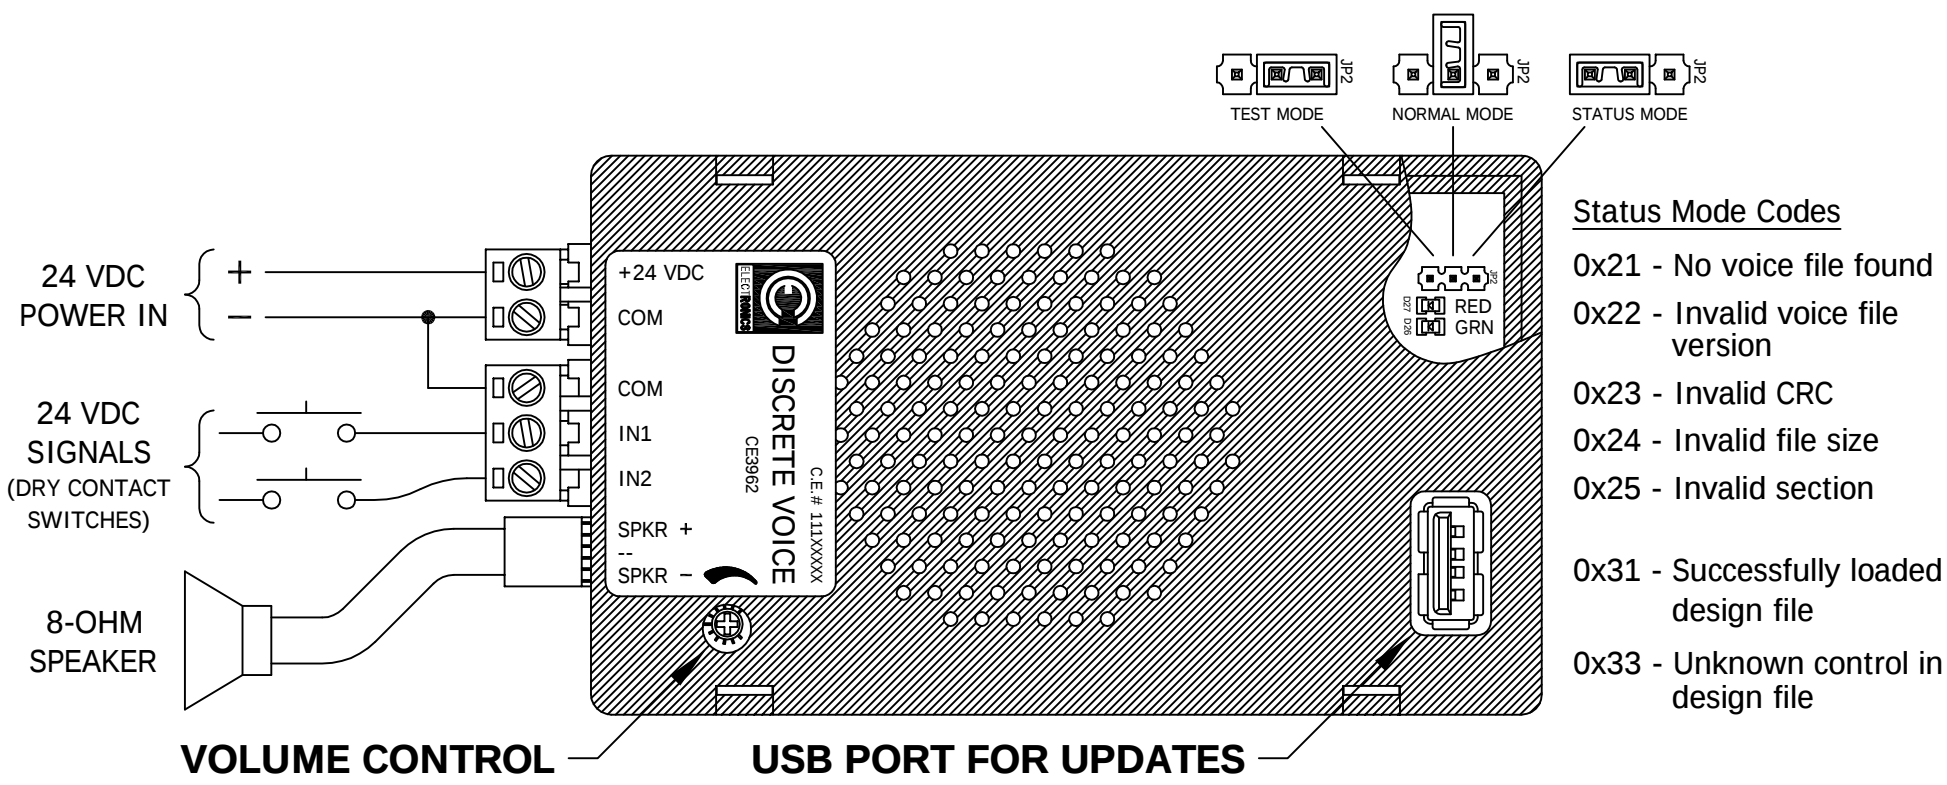

Status Mode LEDs - Using the shunt on JP2 to put the unit in STATUS MODE causes the LEDs to blink a visual code as shown above. For example, '0x24 - Invalid file size' is two RED and four GREEN LED flashes; '0x31 - Successfully loaded design file' is three RED and one GREEN LED flashes.

CODE VERSION _____

BOARD VERSION CE3962 ____

DATE DRAWN: 11/11/19	DRAWN BY: DAC	REQUESTED BY: MK	 C.E. ELECTRONICS, INC. 2107 Industrial Drive Bryan, OH 43506 (419) 636-6705
BOARD NUMBER: 3962	LAST DATE REVISED: 03/18/21	APPROVED BY:	
PRODUCT VS3926 - DISCRETE VOICE UNIT			
REV. NO. VS3962_01			REV: A