




C.E. Electronics, Inc.
2107 Industrial Drive
Bryan, OH 43506
PH (419) 636-6705 FX (419) 636-2516
www.ccelectronics.com

SECPS-XX

Ver. 1 Rel. 05/14/02


SECURITY
BUTTON INTERFACE

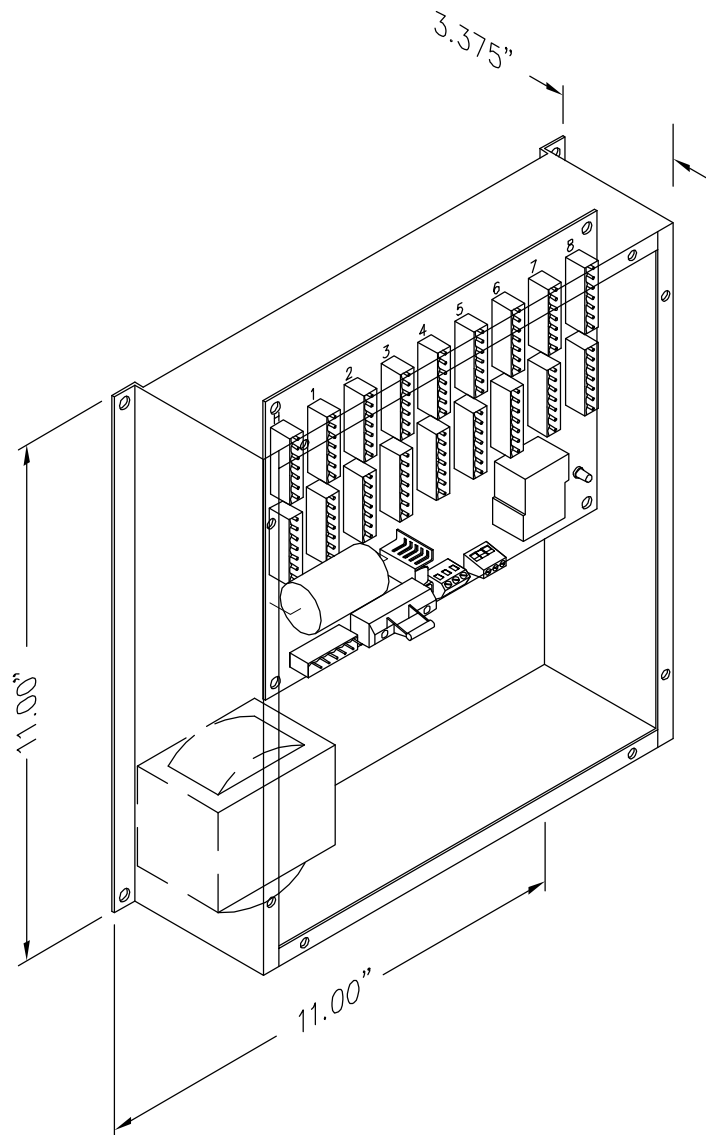

REMOTE PROGRAM STATION

This unit allows you to power and program multiple units from a remote location. Typical applications would include security access for hall call buttons, stairwells, garage, etc. Up to 16 SECO1-XXX may be daisy chained together and programmed from this central location. 8 elevator car units can also be hooked to this module for programming. An onboard override will turn off the remote powered SECO1 units as long as an external input signal is present. Must purchase hand held unit for actual programming.

TYPICAL APPLICATION

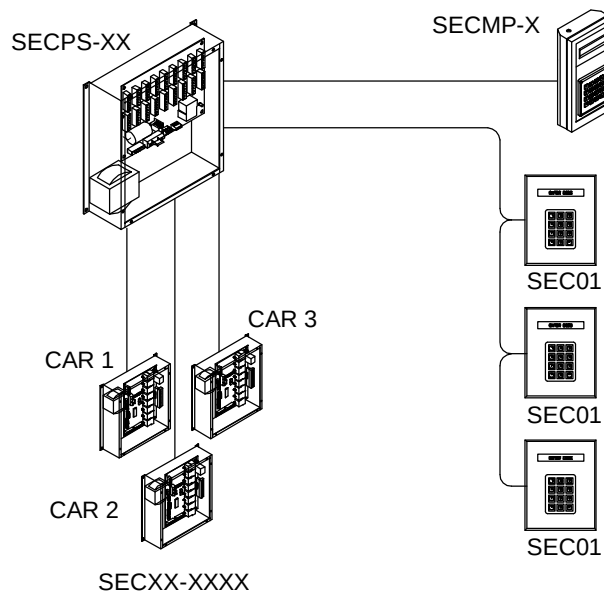

Features:

- Easy installation
- Pluggable connections
- RS485 Interface
- Uses hand held programmer
- Programming ports for up to 8 cars
- On board power supply capable of driving 16 remotes SECO1

TO ORDER - SPECIFY SECPS- X X

HALL AND MAXIMUM NUMBER OF CARS:

"2"
"4"
"8"

OVERRIDE INPUT SIGNAL VOLTAGE:


"A" = 6-20VAC/DC, 24VAC
"B" = 24-48VDC, 48VAC
"C" = 120VAC
"D" = 125VDC
"S" = DRY CONTACT

NOTE:

1. If a special voltage is required, please consult factory.

POWER SUPPLY AND REMOTE PROGRAM INTERFACE

CONTROL ROOM

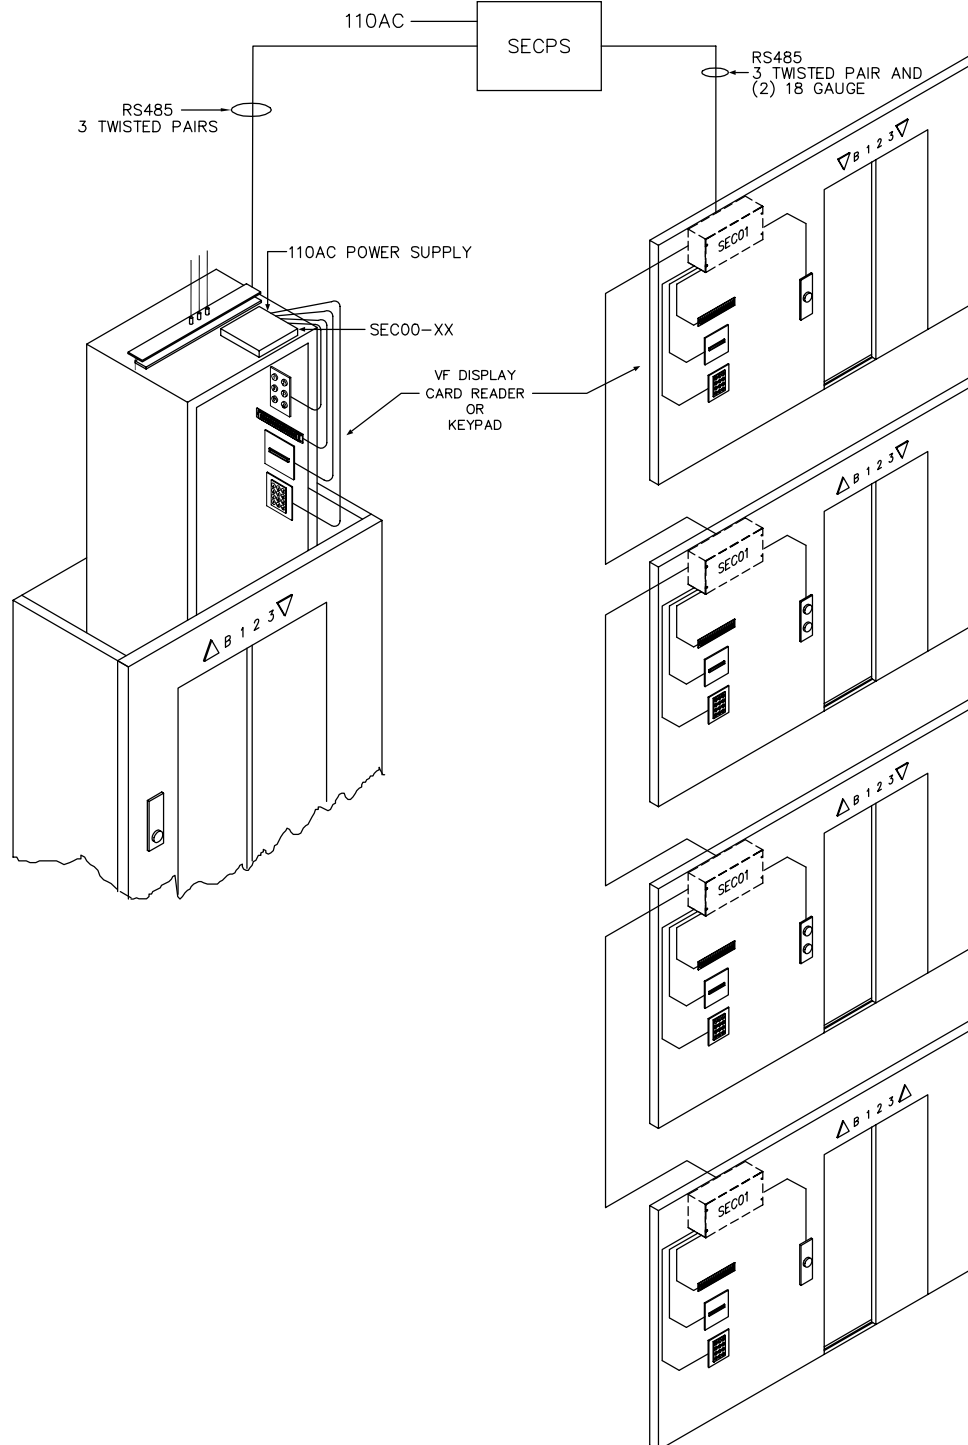

DATE DRAWN: 02/21/97	DRAWN BY: K.L.S.	REQUESTED BY: M.D.G.	 C.E. ELECTRONICS, INC. 2107 Industrial Drive Bryan, Ohio 43506 (419) 636-6705
BOARD NUMBER:	TOLERANCE: N/A	APPROVED BY:	
PRODUCT SECURITY SYSTEM			DWG. NO. SECSYS01
			REV: A