




C.E. Electronics, Inc.
2107 Industrial Drive
Bryan, OH 43506
PH (419) 636-6705 FX (419) 636-2516
www.ceelectronics.com


DHP-X1XXX

Ver. 3 Rel. 12/15/2017

A.D.A.

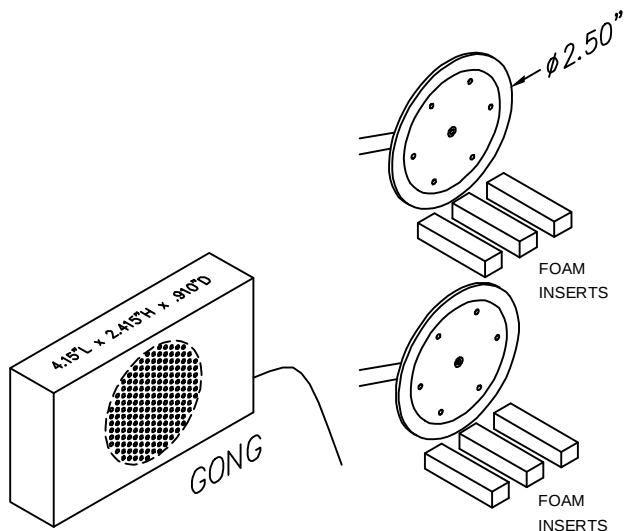

Gong dimensions: 4.15\"L x 2.415\"H x .910\"D



TYPICAL THROUGH WALL TYPE LANTERNS

LENSES NOT INCLUDED; FIXTURES NOT INCLUDED

DHP-X1XXX

HOCKEY PUCK RETROFIT KIT

This kit was designed to replace the light bulbs and mechanical bells with a solid state gong and led insert. These are designed to retrofit into the existing housing.

Features:

- Solid state
- Long life leds
- Easy installation
- Multi color

TO ORDER - SPECIFY DHP-X1XXX

SIGNAL VOLTAGE:

"C" = 110 VAC
"F" = -24 TO -30VDC

ORIENTATION:

"1" = THROUGH THE WALL
"2" = APPLIED METAL

DOWN COLOR CONFIGURATION

"R" = RED LED ELEMENT
"G" = GREEN LED ELEMENT
"W" = WHITE LED ELEMENT
"X" = NO DOWN COLOR

UP COLOR CONFIGURATION

"R" = RED LED ELEMENT
"G" = GREEN LED ELEMENT
"W" = WHITE LED ELEMENT
"X" = NO UP COLOR

NUMBER OF LED UNITS:

"1" = TERMINAL (1 LED ELEMENT)
"2" = INTERMEDIATE (2 LED ELEMENT)

MUST SPECIFY GONG ALSO: SGOMV- X 1

POLARITY:

"B" = BOTH POSITIVE AND NEGATIVE
"P" = POSITIVE UP/DOWN INPUT
"N" = NEGATIVE UP/DOWN INPUT