





C.E. Electronics, Inc.
2107 Industrial Drive
Bryan, OH 43506
PH (419) 636-6705 FX (419) 636-2516
www.ccelectronics.com

VF212-XX


Ver. 3 Rel. 12/06/10

MICRO COMM[®]
DISPLAYS

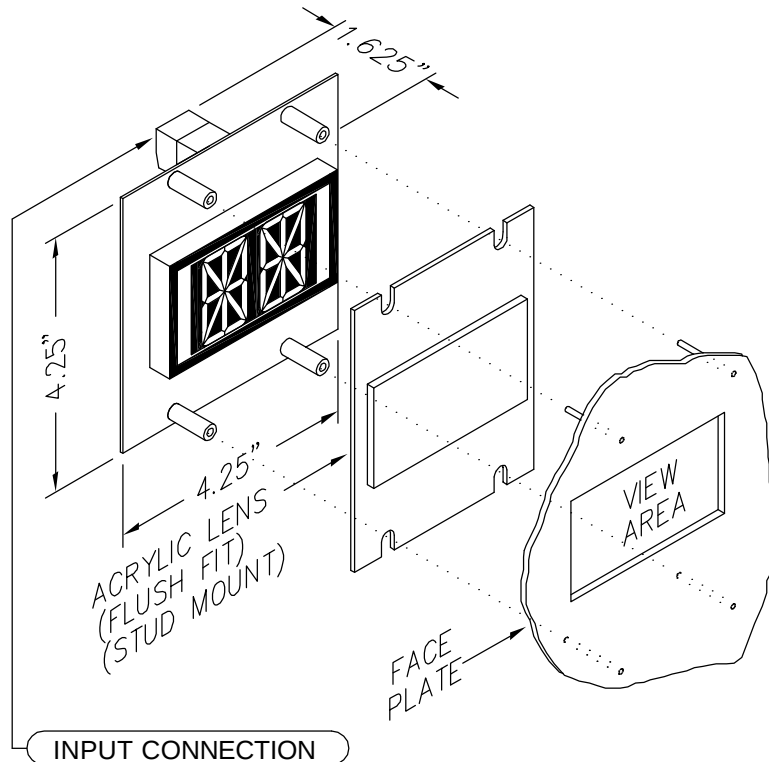

1.2" VFD DISPLAY

PANEL PREPARATION

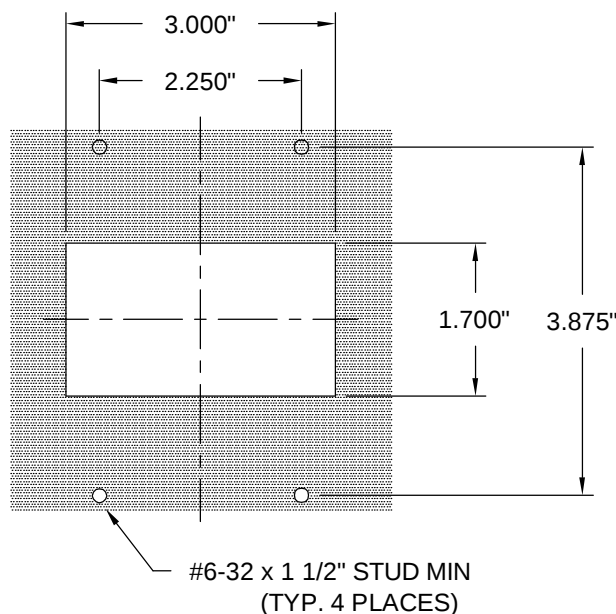

CUTOUT TOLERANCE: +.020
- 0.0

VACUUM FLUORESCENT DISPLAY

Vacuum fluorescent display indicator for floor position.
Any alphanumeric character can be displayed in either
single or double digit floor designations.

Typical Applications:

- Car-OP Panel
- Transoms
- Car and hall fixtures

Features:

- Fast, 3-wire hookup
- Latched inputs
- Cross wire protected
- Self testing
- Alternate message
- Passing chime output
- Error detection and correction feature

RENEWAL PARTS

Lens: 104-6011 GRAY
Lens: 104-9011 BLUE

TO ORDER: - SPECIFY VF212- X X

COLOR:

"B" = BLUE

"G" = GREEN

LENS:



"B" = BLUE

"G" = GRAY



"X" = NO LENS

NOTE:

1. This is not a stand alone unit. Must be used in conjunction with a Micro Comm interface.

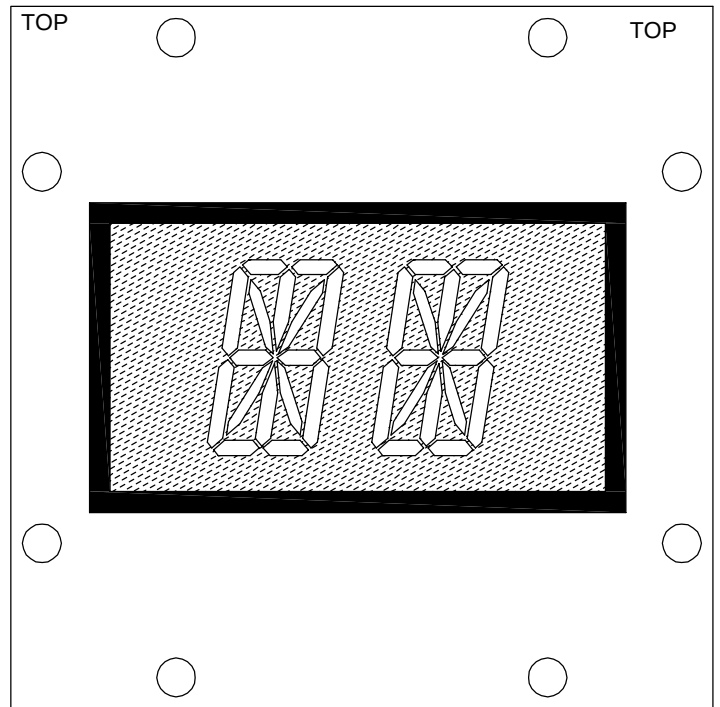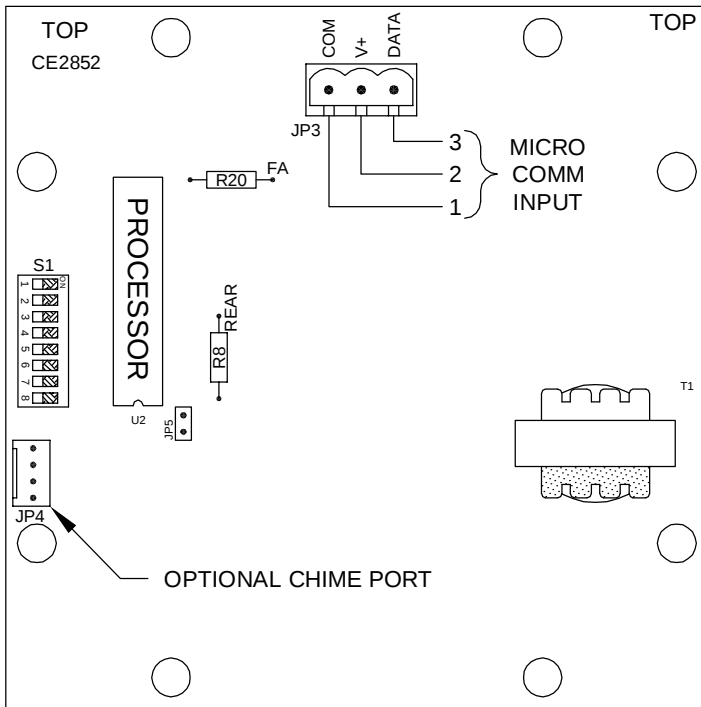


DIP SWITCH DETAIL



DIP SWITCH
LEGEND

DEFAULT SETTINGS



The Micro Comm driver must be programmed to send messages with the level required to activate the features listed below. Level 0 messages will always be displayed, regardless of DIP switch or resistor settings.

For message blocking, turn on DIP switch 1 (MB). This will block level 1 and level 3 messages from being displayed.

To blank the display during a fire main (level three) message, turn on DIP switch 2 (FM).

To blank the display during a fire alternate (level two) message, remove resistor R20 (FA) from the board.

To operate this display as a rear unit remove resistor R8 (R) from the board.

NOTE: The Micro Comm driver must be sending the MC2000 data stream to use this feature. Call Tech Support at 419-636-6705 for more information.

NOTE: MUST BE USED WITH A CLASS 2 POWER SUPPLY.

CODE VERSION _____

BOARD VERSION CE2852 _____

DATE DRAWN: 01/03/06	DRAWN BY: DAC	REQUESTED BY: DC	C.E. ELECTRONICS, INC. 2107 Industrial Drive Bryan, Ohio 43806 (419) 636-6705
BOARD NUMBER: 2852	LAST DATE REVISED: -	APPROVED BY:	
PRODUCT: VF212 MC VF DISPLAY ON OTIS SQ FOOTPRINT			
DWG. NO.: VF212_01			REV: -